



6, 8, & 10 Ton Vertical Blender

Home of Worldwide Quality Blending, Conveying, Tending, & Spreading Products!



Stainless Steel Drum & Support Structure

Stainless Steel Enclosed Legs


3,500 lb. per min. Intake,
3 Ton per min. Discharge Speed



40"-22" or 36"-18" Mild Steel Tapered Auger

Rice Lake Knife and Pivot Scale, w/ Stainless Steel Tubular Frame

Manually Operated, SS Salem Valve Discharge

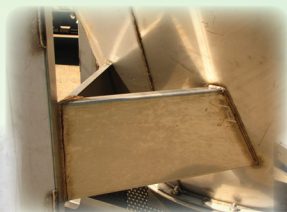

Doyle Equipment Mfg. Co., Inc.

4001 Broadway, P.O. Box 3024, Quincy, IL 62305

Toll Free: 800-788-8085 Fax: 217-223-3655

E-mail: doyle@doylemfg.com Web Site: www.doylemfg.com



Standard Features:

- 12 Ga. #304 stainless steel tank and inlet hopper, 88" diameter
- 3/16" #304 stainless steel blender flat top, legs, and bottom plate
- Heavy duty stainless steel motor / gearbox mount
- 40 in. to 22 in. tapered vertical auger
- 3500 lb. per min. intake - 3 ton per min. discharge
- Large (8' wide), #304 stainless steel intake hopper
- Mild steel intake hopper screen
- Mild steel access ladder
- Blender top and side cone inspection door
- Stainless steel belt guard
- Stainless steel tubular scale frame Note: Standard with 2" x 4" Stainless Steel blocks on scale frames.
- Manually operated, stainless steel salem valve discharge gate, with stainless steel shaft
- 1-15/16", 4 bolt flange bottom bearing
- TEFC Motor
- Rice Lake knife and pivot scale, single loadcell, 420HE digital readout with 2" numerals
- Factory assembled & tested



6 Ton Blender:

- 30 HP TEFC Motor, 40" - 22" Tapered Auger
- 25 HP TEFC Motor, 36" - 18" Tapered Auger

8 Ton Blender:


- 40 HP TEFC Motor, 40" - 22" Tapered Auger
- 30 HP TEFC Motor, 36" - 18" Tapered Auger

10 Ton Blender:

- 50 HP TEFC Motor, 40" - 22" Tapered Auger
- 40 HP TEFC Motor, 36" - 18" Tapered Auger

Hopper Options:

- Extra Large = 9' Wide, 8' Load Height
- Large = 8' Wide, 7'-8" Load Height (Standard Hopper)
- Mid-Size = 7'-6" Wide, 7'-1" Load Height
- Low Profile = 6'-9" Wide, 6'-6" Load Height

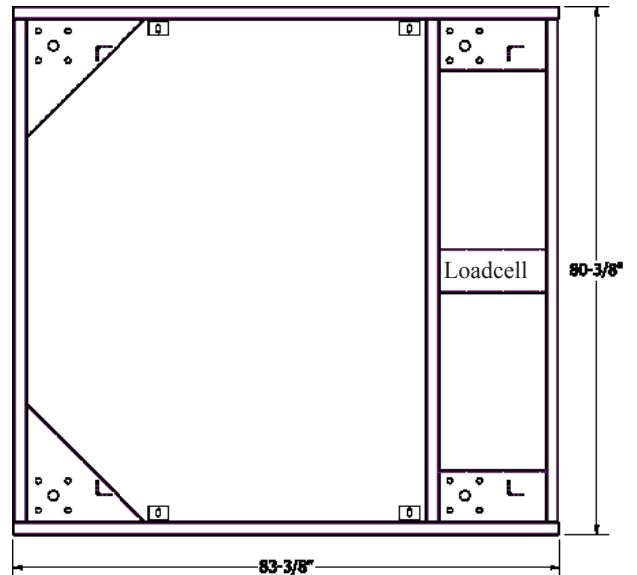

Frame Dimensions

