

## FITTINGS

# DUCTILE IRON ACME SERVICE TEE



**DUCTILE  
IRON**

*350 psi  
Pressure  
Rating*

*Gasketed  
Mainline  
Bells*

*Straight  
Thread,  
O-Ring Seal  
Branch  
Outlet*

*Faster  
Installation*

*No Teflon  
Tape or Paste*

*Eliminates  
Split Threads*


## Gasket x Gasket x Acme, O-Ring

### Application

For use with swing joints having compatible inlet (threads and O-ring for Rainbird/Toro/Hunter Acme standard).

### Installation

Fully thread swing joint into service tee. Back off to final position per swing joint manufacturer at least 1/4 rotation, but no more than 1 1/4 rotation.



### Suggested Specifications

Service tees for swing joints shall be push-on gasketed and molded in one piece as manufactured by The Harrington Corporation of Lynchburg, Virginia. Branch outlets shall have a straight thread and an O-ring sealing surface compatible with the O-ring joint inlet of the mating swing joint. Fittings shall meet the requirements of a 315 psi long term pressure rating per ASTM D3139, per ASTM F1970, and per the methods of AWWA C907.

### Product Information


Size	Part Number	Style
2 x 1	8015302	A
2 x 1 1/4	80153025	A
2 x 1 1/2	8015303	A
2 1/2 x 1	8025302	A
2 1/2 x 1 1/4	80253025	A
2 1/2 x 1 1/2	8025303	A
3 x 1	8035302	B
3 x 1 1/4	80353025	B
3 x 1 1/2	8035303	B
4 x 1	8045302	B
4 x 1 1/4	80453025	B
4 x 1 1/2	8045303	B
6 x 1	8065302	B
6 x 1 1/4	80653025	B
6 x 1 1/2	8065303	B
8 x 1	8085302	B
8 x 1 1/4	80853025	B
8 x 1 1/2	8085303	B



STYLE A



STYLE B

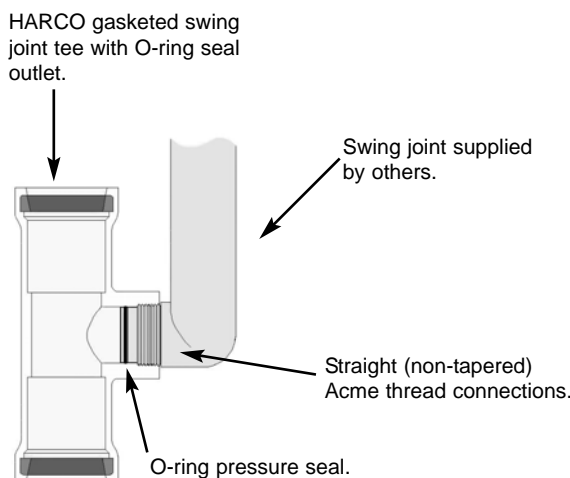

HARRINGTON CORPORATION • P.O. BOX 10335 • LYNCHBURG, VIRGINIA 24506

PHONE: 434-845-7094 • FAX: 434-845-8562 • E-MAIL: sales@harcofittings.com • WEB: www.harcofittings.com